


6" 140 RX 35

acciaio inox microfuso - casted stainless steel

PANELLI®

Motore - Motor - Moteur 50 Hz - 2900 rpm				Q = Portata - Capacity - Debit						
Tipo - Type	Power		V 400	l/min	0	400	500	600	700	800
	kW	HP	A	l/sec	0	6,67	8,33	10	11,67	13,33
				m³/h	0	24	30	36	42	48
140 RX 35/03	7,50	10	17,5	H[m]	51	48	45	41	36	30
140 RX 35/04	9,20	12,5	21		68	64	60	55	48	40
140 RX 35/05	11	15	24,5		85	80	76	69	60	50
140 RX 35/06	13	17,5	28		102	96	91	82	72	60
140 RX 35/07	15	20	32		119	112	106	96	84	70
140 RX 35/09	18,50	25	40		153	144	136	123	108	90
140 RX 35/11	22	30	47,5		187	176	166	151	132	110
140 RX 35/13	26	35	55		221	208	196	178	156	130
140 RX 35/15	30	40	62,5		255	240	227	206	180	150
140 RX 35/18	37	50	78		306	288	273	247	216	180

Motore - Motor - Moteur 50 Hz - 2900 rpm	Dimensioni di ingombro e pesi Overall dimensions and weights				
Tipo - Type	A mm Tri	B mm	C mm Tri	M kg Tri	P kg
140 RX 35/03	1153	452	701	55	13
140 RX 35/04	1266	515	751	60	15,5
140 RX 35/05	1389	578	811	65	18
140 RX 35/06	1482	641	841	70	20,5
140 RX 35/07	1635	704	931	75	23
140 RX 35/09	1821	830	991	83	28
140 RX 35/11	2027	956	1071	92	33
140 RX 35/13	2263	1082	1181	100	38
140 RX 35/15	2459	1208	1251	108	43
140 RX 35/18	2738	1397	1341	118	47

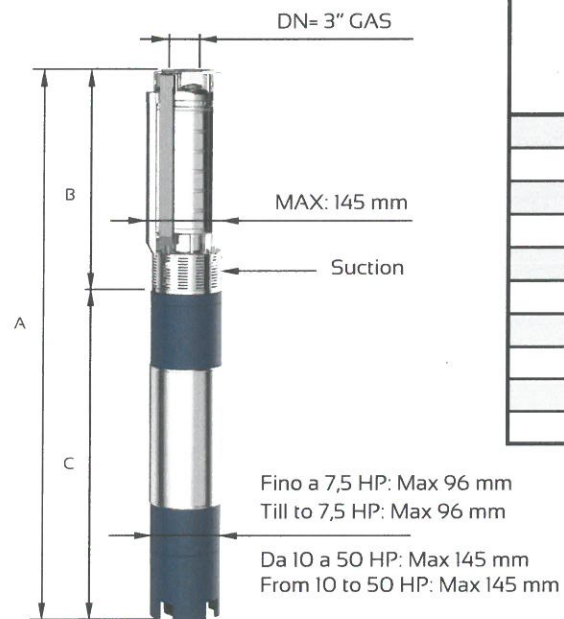

n% = Rendimento della pompa Max 74,6%
kW/st = Assorbimento per stadio Max 1,97

n% = Rendement de la pompe Max 74,6%
kW/st = Absorption par étage Max 1,97

n% = Pump efficiency Max 74,6%
kW/st = Stage absorption Max 1,97


n% = Rendimiento de la bomba Max 74,6%
kW/st = Potencia absorbida por etapa Max 1,97

Tolleranza alla sabbia 50 g/m³ - Sand tolerance 50 g/m³ - Compatibilità con acqua potabile DM 174
Drinking water compatibility according to DM 174
MEI ≥ 0,4 (direttiva EU No. 547/2012 - regulation EU N. 547/2012)
Tolleranze secondo UNI ISO 9906 livello 3B - Tolerances according to UNI ISO 9906 grade 3B

acciaio inox microfuso - casted stainless steel

PANELLI®

6" 140 RX 35

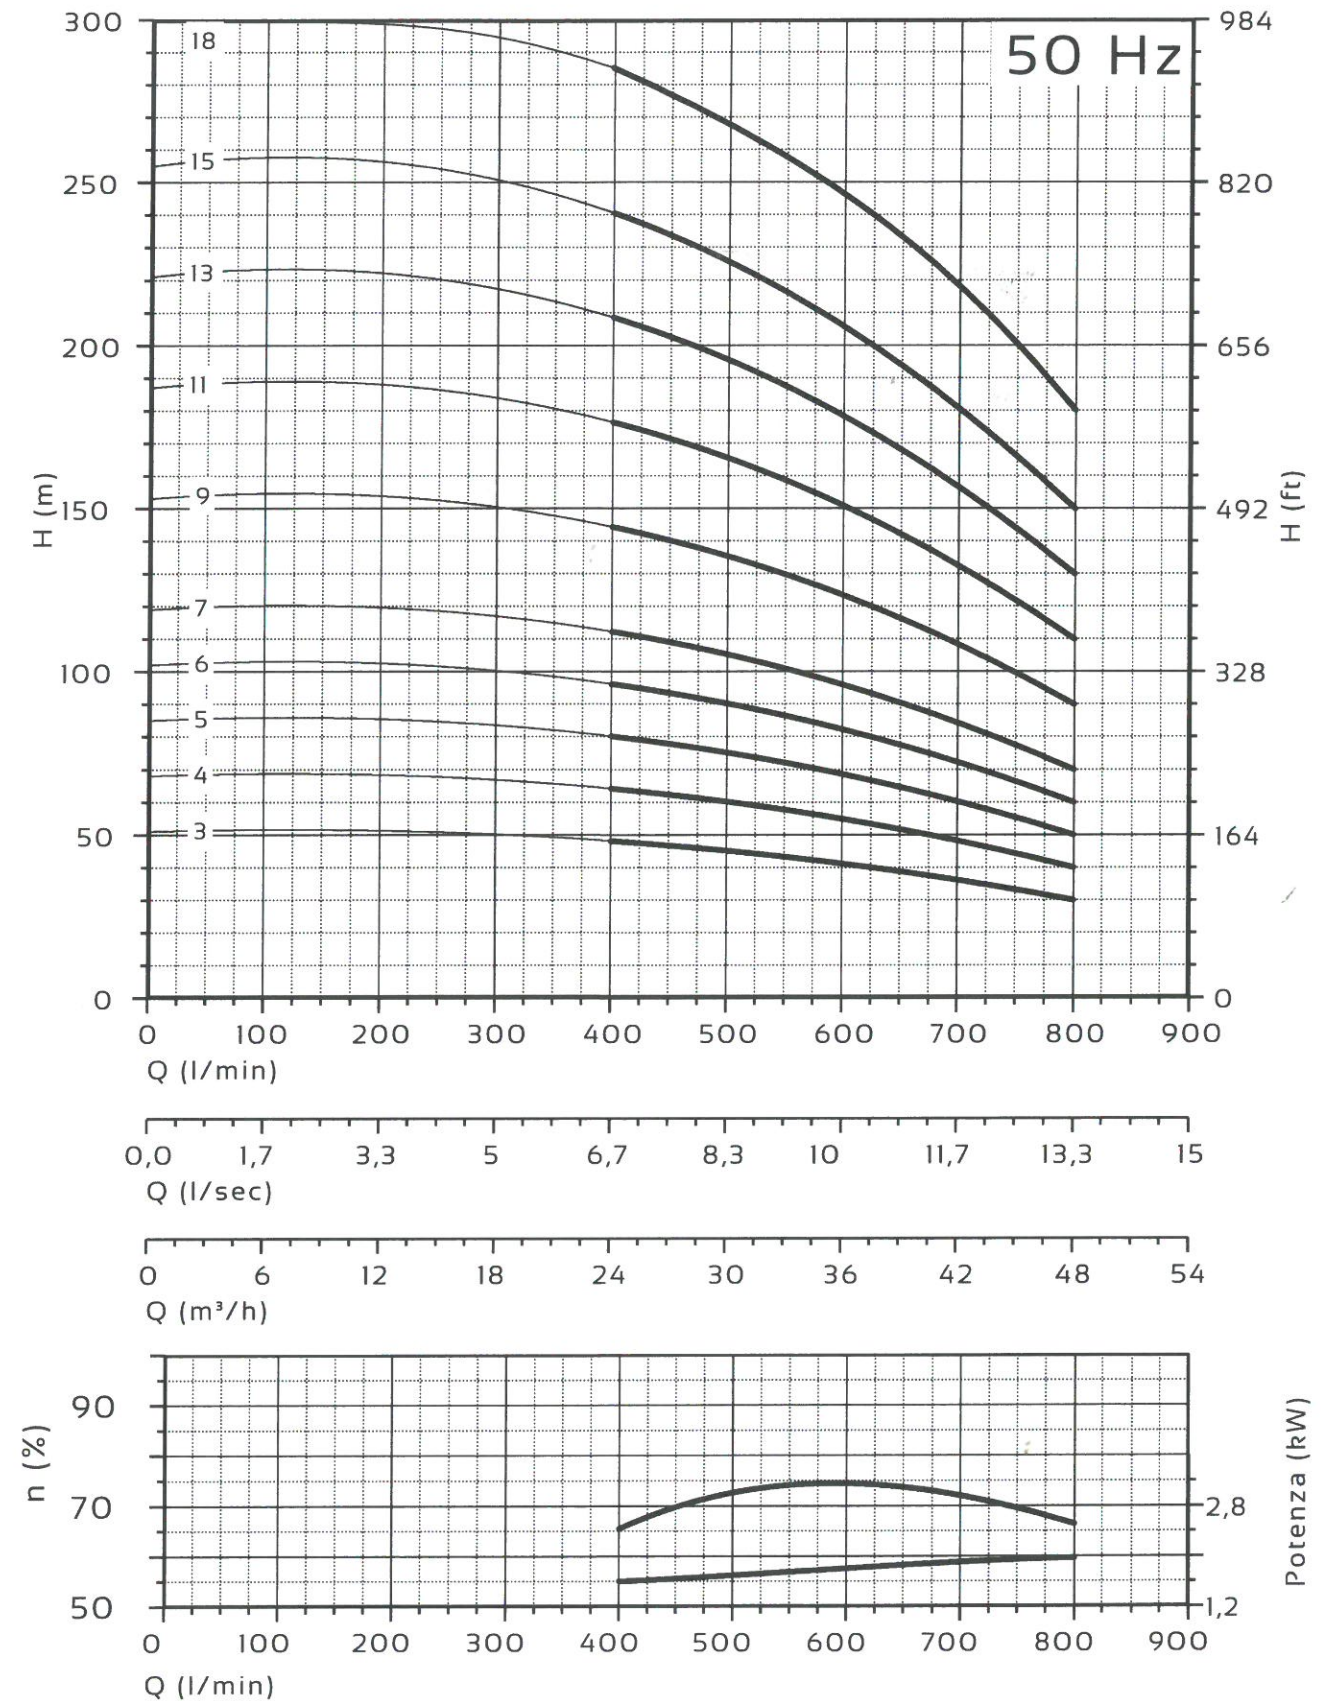

NPSH (m)	25%	50%	75%	100%
140 RX 35	3,4	3,4	3,8	8